

Specialists in Gravimetric Blending & Controls

TSM

OPTIMIX-1500 Series

Advanced Dosing Solutions



Benefits

- High Accuracy Dispensing up to 0.01% of Batch
- Product Consistency
- Increased Regrind Usage
- Continuous Homogeneous Mixing
- Faster Product Changes

User Interface

- Intuitive Simple Operator Functionality
- Comprehensive Report!/Alarm Management
- Built-in Trending & Data History Management
- Industry Standard Communication Protocols
- Material Usage / Inventory & Reports

OPTIONS

- Extrusion Control
- Off-Line Blending
- Regrind Flow Assist Devices
- Flange Adaptors
- Integrated Material Handling

The **OPTIMIX-1500 Series** Batch Blender can accommodate up to four material components while providing throughput rates up to 1500 kg/hr. The range of blenders utilises the patented TSM slide valve design and the patented reverse-flight auger mixing technology. This combination provides superior accuracies, blend ratios and mixing homogeneity that is not achievable by competitive systems.

All components are blended by weight based on the preset blend ratios on the microprocessor controller. Each component is metered separately into a single weigh hopper, which measures and controls their rate.



Specialists in Gravimetric Blending & Controls

OPTIMIX-1500 Series


Advanced Dosing Solutions

Modular Construction:

BLENDER MODEL	STD. NO. OF COMPONENTS	MAXIMUM BATCH SIZE	STD. UNIT	EASY DRAIN	MAX. NO. OF SIDE FEEDERS	MAX MICRA-DOSE SIDE FEEDERS	MAX POWDER SIDE FEEDER (SEE NOTES)	MAX AUGER SIDE FEEDERS	LIQUID DOSING SIDE FEEDER	INTERNAL AUTO-CLEAN	BIN BLOW DOWN AUTO-CLEAN	MATERIAL BYPASS AUTO-CLEAN	EASY-DRAIN	AUTO EASY-DRAIN
OPTIMIX-1000	4	12.0kg	1500 kg/hr	OPT	4	2	0	2	N/a	OPT	OPT	OPT	OPT	OPT

Environmental:

Blender Weight	(kg / lb)	170 / 374
Max Ambient Operating Temp	(°C / °F)	50 / 122
Max Material Temp	(°C / °F)	70 / 158
Max Optional Material Temp	(°C / °F)	130 / 266
Mix Chamber Discharge Hole	(mm / ")	101 / 4

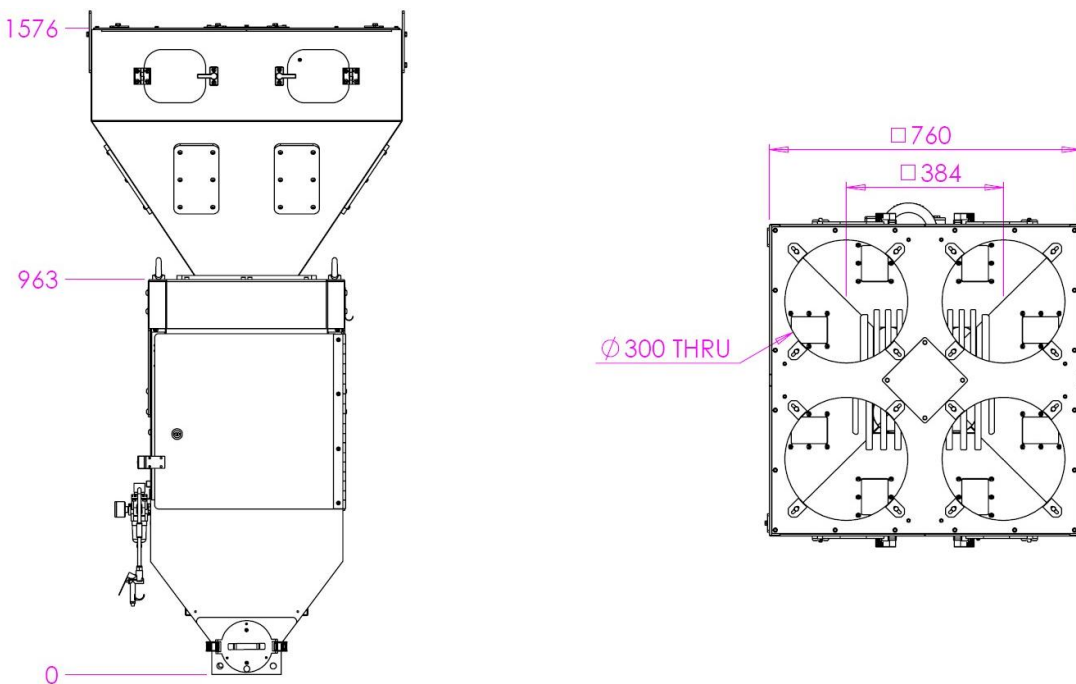

European Office (Headquarters)	North America Regional Offices	Asia-Pacific Regional Office	China Regional Office
<p>TSM Ard Easmuinn, Dundalk, Co. Louth, Ireland.</p> <p>Tel: +353-42-9335560</p> <p>General Info: info@tsm-controls.com Sales: sales@tsm-controls.com Support: service@tsm-controls.com</p>	<p>TSM Inc. 1505 Johnson Ferry Road Marietta, GA 30062, USA.</p> <p>TSM Inc. 1404 Joliet Road, Romeoville, IL 60446, USA.</p> <p>Tel: (770) 886-6630</p> <p>General Info: Info@us.tsm-controls.com Sales: sales@us.tsm-controls.com Support: service@us.tsm-controls.com</p>	<p>TSM Taiwan Taichung City, Taiwan,</p> <p>Tel: +886-4-24728185</p> <p>General Info: info@tsm-controls.com.tw Sales: sales@tsm-controls.com.tw Support: service@tsm-controls.com.tw</p>	<p>TSM China Room 2423, IPC Center, No. 983, East HuangPu AVE, HuangPu District, GuangZhou City 510000, China.</p> <p>Tel: +86-139-25062596</p> <p>General Info: china@tsm-controls.com Sales: china@tsm-controls.com Support: china@tsm-controls.com</p>